


TRANSMISSION FLUID MULTI

**AUTOMATIC
TRANSMISSION FLUID**

**Compatible with the wide range of
Japanese AT cars from family cars
to luxury sedans!**

Automatic transmission fluid which was developed for Japanese cars using high-performance additives and synthetic base oils.
High-performance ATF that is compatible with a wide range of car models.

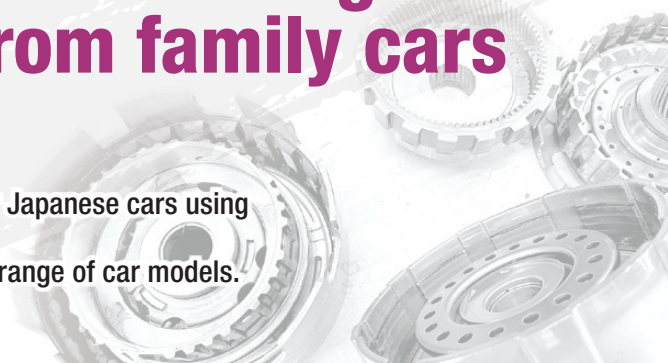

A T F
FULLY SYNTHETIC
MULTI




Item Code	Package
A001MLTA	1L×20pcs
A004MLTA	4L×6pcs
A020MLTA	20L×1pc

Tanikawa Chemical Laboratory

TCL®

TRANSMISSION FLUID MULTI



**AUTOMATIC
TRANSMISSION FLUID**

A T F
FULLY SYNTHETIC
MULTI

■ Product features

- TCL ATF MULTI maintains transmission performance for a long period of time, then, providing comfortable driving with smooth, reliable shifting performance and excellent protection.
- This ATF(automatic transmission fluid) reduces transmission resistance at low temperatures, ensuring smooth driving and fuel efficiency from the moment the engine starts.
- TCL ATF has excellent shear stability, oil film strength properties and anti-wear properties, which helps reduce transmission wear and extend transmission life.
- Provides smooth gear shifting and reliable torque transmission in a wide range of low to high temperature conditions.
- It has excellent high-temperature oxidation stability, suppresses ATF deterioration and sludge generation inside the AT, and provides stable judder prevention for sustained fuel-efficient and comfortable driving.
- Compatible with major Japanese manufacturers

DEXRON II, III, IV	Toyota Type T-IV, WS
Honda DW-1, Z1	Mazda 3317, 3324, F1, FZ, M-III, M-V
Mitsubishi J2, J3, SP II, SP III	Nissan Matic Fluid C, D, J, S
Subaru 4ATF, 5ATF, HP	Suzuki 2384K, 3317

- Cannot be used with vehicles that require a special ATF or CVT vehicles.
- Before replacing the ATF, make sure there are no abnormalities. Replacing the ATF without sufficient checking may cause problems.

■ Representative physical properties

Appearance	Clear Red	
Density (15°C)	g/cm ³	0.8520
Color (ASTM)		-
Flash point (COC)	°C	206
Pour point	°C	<-42.5
Viscosity (-40°C)	mPa·s	12,000
Kinematic viscosity (40°C)	mm ² /s	34.97
Kinematic viscosity (100°C)	mm ² /s	7.28
Viscosity index		179
Base number (PCA)	mgKOH/g	2.25
Foaming test (Seq II)	ml	0/0

■ Specifications

Usage	Automatic Transmission Fluid
Product Line	ATF
Product Name	TCL ATF MULTI
Base Oil	Fully Synthetic



TANIKAWA YUKA KOGYO CO.,LTD.
1-13-11, Yako, Tsurumi-ku, Yokohama, 230-0001, Japan

URL:www.tanikawayuka.co.jp

