

TRANSMISSION FLUID CVTF MULTI

CONTINUOUSLY VARIABLE
TRANSMISSION FLUID


**Compatible
with the wide range of Japanese CVT cars
from family cars to luxury sedans!**

This CVTF(continuously variable transmission fluid) is developed for Japanese cars using high-performance additives and synthetic base oils and is compatible with the wide range of Japanese cars.

CVTF

FULLY SYNTHETIC

MULTI

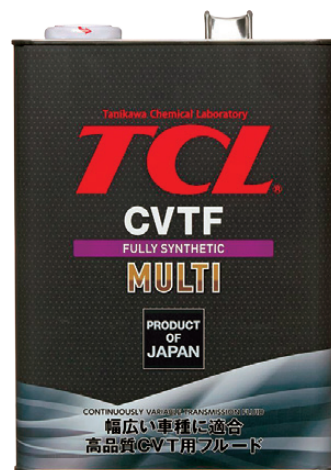

Item Code	Package
A001MLTC	1L×20pcs
A004MLTC	4L×6pcs
A020MLTC	20L×1pc

Tanikawa Chemical Laboratory

TCL®

TRANSMISSION FLUID CVTF MULTI



CONTINUOUSLY VARIABLE
TRANSMISSION FLUID

CVTF
FULLY SYNTHETIC
MULTI

Product features

- TCL CVTF MULTI maintains transmission performance for a long period of time, then, providing comfortable driving with smooth, reliable shifting performance and excellent protection.
- Excellent judder prevention performance and high metal wear characteristics provide a comfortable driving feel and reliability.
- With its high power transmission performance, the output from the engine is firmly transmitted to the timing belt, resulting in smooth and reliable gear changes and a comfortable ride.
- Excellent low-temperature fluidity and viscosity characteristics improve transmission efficiency and starting, then providing smooth starting even in low-temperature environments.
- Compatible with major Japanese manufacturers

Toyota TC, FE	Honda Ultra HMMF (With Torque Converter only),
Honda Ultra HCF-2	Nissan NS-1, NS-2, NS-3
Mazda 3320	Mitsubishi J1, J4, J4+
Subaru Lineartronic, LineartronicII	Suzuki 3320, Green 1, Green 2

- Cannot be used on Nissan Extroid CVT or AT equipped vehicles.
- Not compatible with vehicles equipped with automatic transmission.
- Before exchanging CVTF, make sure to check CVT has no problems or damage. Note that replacing CVTF without adequate confirmation may cause any troubles.

Representative physical properties

Appearance		Clear Brown
Density (15°C)	g/cm ³	0.8522
Color (ASTM)		L1.5
Flash point (COC)	°C	208
Pour point	°C	-55.0
Viscosity (-40°C)	mPa·s	12,800
Kinematic viscosity (40°C)	mm ² /s	35.81
Kinematic viscosity (100°C)	mm ² /s	7.24
Viscosity index		172
Base number (PCA)	mgKOH/g	2.26
Foaming test (Seq)	ml	20/0

Specifications

Usage	CVT Fluid
Product Line	CVTF
Product Name	TCL CVTF MULTI
Base Oil	Fully Synthetic

TCL

TANIKAWA YUKA KOGYO CO.,LTD.
1-13-11, Yako, Tsurumi-ku, Yokohama, 230-0001, Japan

URL:www.tanikawayuka.co.jp

